

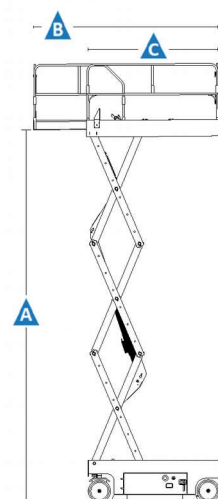


LINE// Specifications

	GN-2032	GN-2632
Working height*	8,3 m	10,1 m
A Platform height	6,3 m	8,1 m
Platform dimension (length x width)		
C D - platform retracted	2,25 m x 81 cm	2,25 m x 81 cm
C B - platform extended	3,15 m x 81 cm	3,15 m x 81 cm
E Height - stowed	2,22 m	2,35 m
F Height - rails folded	1,83 m	1,96 m
G Height – transport position (minimum height)	1,32 m	1,45 m
H Length - stowed	2,39 m	2,39 m
K Width	0,81 m	0,81 m
I / J Ground clearance (center/with pothole guards deployed)	10 / 2 cm	10 / 2 cm
Productivity		
Max platform occupancy	2 / 1	2 / 0 INDOOR-ONLY
Lift capacity	380 kg	250 kg
Drive speed - stowed	3,2 km/h	3,2 km/h
Drive speed - raised	0,8 km/h	0,8 km/h
Gradeability**	30%	25%
Turning radius - inside	zero	zero
Turning radius - outside	2,1 m	2,1 m
Raised / lower speed	25–30 / 30–35 sec	30–35 / 34–39 sec
Controls	proportional	proportional
Tyres – solid non-marking	380x125mm	380x125mm
Power		
Power source	24V DC (4 standard acid batteries) 6V 225 Ah	24V DC (4 standard acid batteries) 6V 225 Ah
Hydraulic system capacity	15 L	16 L
Sound and Vibration levels		
Sound pressure level - ground	<70 dBA	<70 dBA
Sound Pressure level - platform	<70 dBA	<70 dBA
Vibration	<2,5 m/s ²	<2,5 m/s ²
Weight***		
	1,770 kg	1,970 kg
CE – Standard Compliance	EC Directives: 2006/42/EC – machinery EN280:2013); Directives 2004/108/EC (EMC); Directives 2006/95/EC (LVD)	

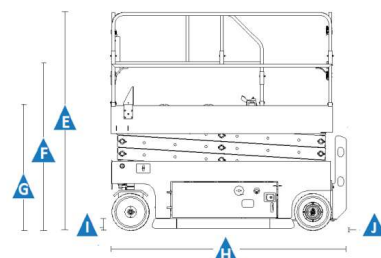

* the metric equivalent of working height adds 2m to platform height.

** gradeability applies on driving on slopes. See operator's manual for details regarding slope ratings

*** weight will vary depending on options and/or country standards

QLINE/ Features

Standard Features

GN-2032

- 8,3 m – working height
- 380 kg – lift capacity
- steel frame platform – (2,25 m x 81 cm)

GN-2632 INDOOR-ONLY

- 10,1 m – working height
- 250 kg – lift capacity
- steel frame platform (2,25 m x 81 cm)

Productivity

- Electrostatic powder coating system
- Unical platform stability, construction is much more solid, platform extension smoothly operated
- Solid floor made of anti-slippery, ruffled metal sheets
- Durable steel protection railings with openable gate
- Riffled-surface steps
- 1 working light mounted at the end of platform extantion deck (LED spotlight)
- Handles for crane lifting
- Hydraulic Drive motors protection
- Hydraulic hoses protection
- Machine prepared for either side or back forklift loading
- Side protection pads on the chassis and components swing-out trays
- Stable and solid swing-out electric and hydraulic components trays – key lockers
- Onboard electronic system DELTA 5, USA, possible calibration without PC
- Platform control joystick with battery charge indicator
- Fully proportional joystick for left or right handed users
- Emergency stop at both platform and ground controls
- Battery charging access point on the side of the machine
- 230 V electric line to platform with circuit breaker protection
- Manual platform lowering valve
- Back wheel hydraulic dynamic braking
- Manual hydraulic brake release
- Electronic horn
- Tilt level sensor with audible alarm
- Hour meter
- Certified load sensor
- Flashing LED beacons

Power

GN-2032; GN-2632

- 24 V DC – four 6V standard acid batteries - 225 Ah
- Universal 20 AMP smart charger

Drive

- Hydraulic, dual front wheel drive

Tyres

- Solid non-marking

Additional Options

- Airline to platform
- Biodegradable hydraulic oil
- Maintenance free lithium battery, Gell battery or AGM battery option
- Individual painting colors selection on demand
- Parktronic System (parking sensors set)
- GPS with acces device
- EX explosion proof by ATEX

